



(43) International Publication Date  
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number  
**WO 2005/094097 A1**

(51) International Patent Classification<sup>7</sup>: **H04Q 7/22, 7/32**

(21) International Application Number:  
PCT/SE2004/000481

(22) International Filing Date: 26 March 2004 (26.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)**  
[SE/SE]; S-164 83 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SKOG, Robert**  
[SE/SE]; Gullvivegränd 7, S-165 76 Hässelby (SE).  
**BLECKERT, Peter** [SE/SE]; Stigbergsvägen 3, S-752 42 Uppsala (SE).

(74) Agent: **AROS PATENT AB**; P.O. Box 1544, S-751 45 Uppsala (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**


— of inventorship (Rule 4.17(iv)) for US only

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD AND APPARATUSES FOR SENDING MESSAGE TO A MOBILE STATION BY ADDRESSING THE HARDWARE PART

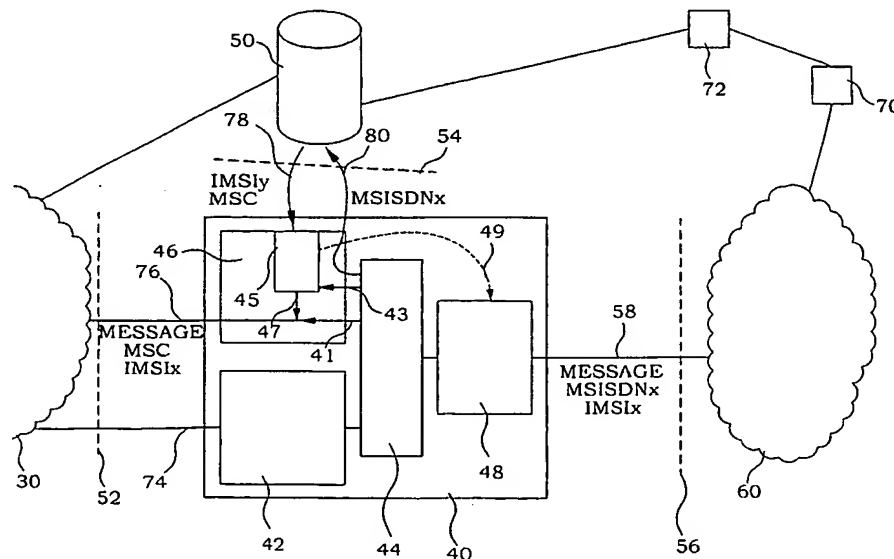

(57) Abstract: A message, typically a SMS message, intended for a specific hardware item is provided from an application node (70) to a message controller (40) together with hardware identification data, e.g. IMSI or IMEISV. The message controller (40) and a location updated subscriber database, e.g. a HLR (50), having stored information about the intended terminating hardware, interacts (78, 80) and a further handling of the message is decided based on the provided hardware identification data and on data stored in the location updated subscriber database (50).

WO 2005/094097 A1